


STRENGTH AREA

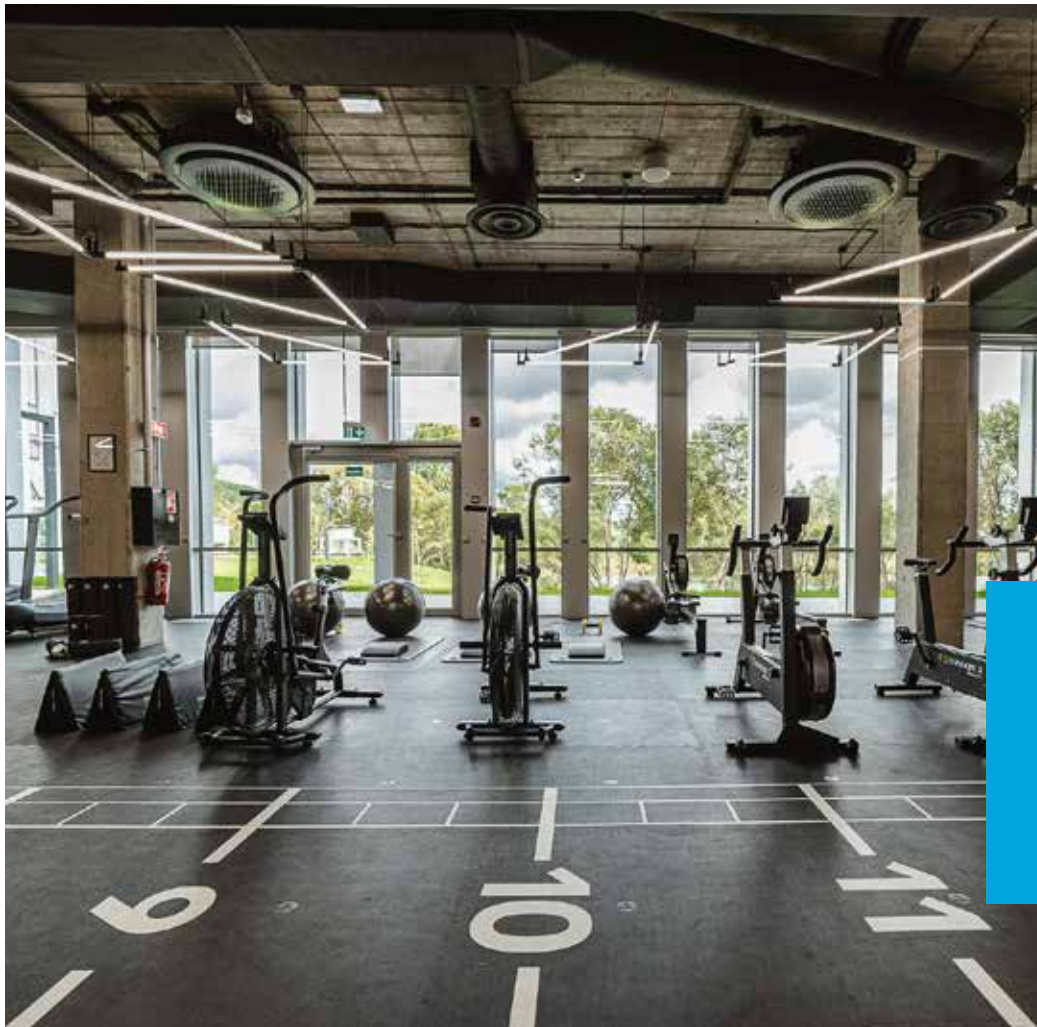

DATASHEET

P PAVIGYM ENDURANCE

Its high density provides supreme resistance for standard cardio, functional training & free weight areas (medium loads).

TECHNICAL INFO

Weight		8,4 kg
Density	UNE-53526	1.200 kg/m ³
Hardness	din 53505	75° Shore A
Water absorption	ASTM D570	0%
Coef. of linear dilatation	0°C-40°C	1,5 10 ⁻⁴ °C ⁻¹
Fire reaction	EN 13501-1	Cfl-s2 (Op. Bfl-sl)
Sound insulation	ISO 10140-3	15,4 dB


COMPARATIVE CHART

	PAVIGYM ENDURANCE S&S	PAVIGYM ENDURANCE	RECYCLED RUBBER (ROLLS)
Comfort	*****	***	**
Marks resistance (medium loads)	*****	****	***
Marks resistance (heavy loads)	****	***	**
Sound insulation	*****	***	**
Durability	*****	****	***
Hygienic / Anti-bacterial protection	*****	*****	**
Thermal insulation	*****	*****	***
Water resistance	*****	*****	***
Easy to install & maintain	*****	*****	**

COLOURS




PAVIGYM LIME




PAVIGYM ORANGE




PAVIGYM CYAN




PAVIGYM RED




PAVIGYM MAGENTA




PAVIGYM PURPLE




PAVIGYM WENGUE




PAVIGYM WALNUT



PAVIGYM JET BLACK



PAVIGYM BEECHWOOD



PAVIGYM STONE GREY




PAVIGYM B. MARBLE*

*GRAINED EFFECT

*The appearance and color of these images may differ slightly from the final product.



INTERLOCKING SYSTEM



To avoid product counterfeiting, our tiles are marked with the Pavigym logo.

THICKNESS
7 MM*



*Approximate value



VIRGIN RUBBER MLECULE
PERFECT POLYMELIC CHAIN

RAW MATERIAL

Pavigym Endurance is made from the best 100% recyclable and reusable virgin rubber.



Virgin rubber



100% recyclable



Cfl certificate
(Flames do not spread, nor generate toxic smoke)




Not recycled tyre rubber



PVC free

COMPARATIVE CHART

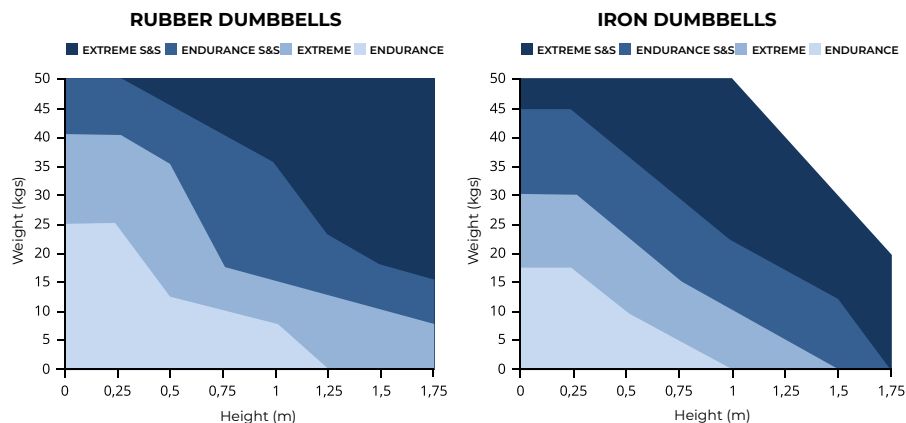

BENEFITS

1

Tear resistance

Pavigym Endurance is 6 times more resistant than recycled rubber from tyres, it is practically unbreakable.

2

Anti-slip surface

Prevents movement of machines & equipment.



3

Reduces noise and sound vibration

It helps to create a more comfortable environment for the user and other people within the building.

4

Hygienic condition.

No migration: No transfer of chemicals to the surface as happens in recycled rubber tiles.

Non-porous: No liquids leak through, easy to clean, no mould, no bad odour.



5

Easy to install

- Loose laid flooring.
- No adhesive required.

- Easy to change, tile by tile.
- Huge time & cost saving.

6

Aesthetics

- Personalised designs with logos and markings.
- Available in 12 colours.

STRENGTH AREA

