
EAS ~ 4 STRENGTH







Maximum level of resistance for fitness, functional training and free weight areas (medium loads).



Superior level of resistance against damage for free weight (medium loads), fitness & functional training areas. High impact absorption of falling objects

TECHNICAL INFORMATION

		100x100cm	
Weight		8,8 kg	
Density	UNE-53526	1.200 kg/m³	
% water absorption	ASTM D570	0%	
Coef. linear dilatation	0°C-40°C	1,5 10 ⁻⁴ °C ⁻¹	
Fire classification	EN 13501-1	Cfl-s2	
Sound insulation	ISO 10140-3	15,4 dB	

COMPARATIVE CHART

	PAVIGYM EXTREME S&S	PAVIGYM EXTREME	RECYCLED RUBBER (ROLLS)
Comfort	****	***	**
Energy restitution / ppoint elastic	****	***	***
Marks resistance (regular loads)	****	****	***
Marks Resistance (big loads)	****	***	**
Sound insulation	****	***	***
Durability	****	****	***
Hygienic / Anti-bacterial protection	***	****	***
Thermal insulation	****	***	***
Water resistance	****	****	***
Easy to install & maintain	***	****	**

COLOURS

*The appearance and color of these pictures may differ slightly from the final product.



PURE STONE



PAVIGYM NATURAL CLAY



SUPER BLACK



PAVIGYM **BROWN GRAVEL**

SPECIAL COLOURS






PAVIGYM LTD GREEN



PAVIGYM LTD ORANGE








*Contact us for more

PAVIGYM BLACK & BLACK









RAW MATERIAL

Pavigym Extreme is made of recycled Pavigym Endurance.



Virgin rubber



100% reciclable



Cfl certificate (Flames do not spread, nor generate toxic smokes)




Not recycled tyre rubber



PVC Free


COMPARATIVE

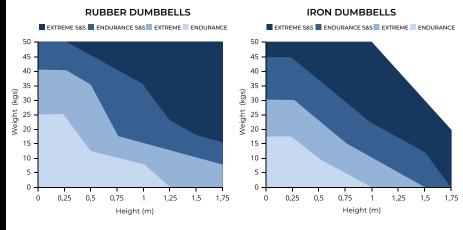

BENEFITS

High resistance against indentations Protects against surface indentations commonly produced.

Protects against surface indentations commonly produced by the feet of machines and tumbling dumbbells.



Tear resistance Pavigym Extreme is 6

Pavigym Extreme is 6 times more resistant than recycled rubber from tyres, it is practically unbreakable.

Anti-slip surface

Prevents movement of machines & equipment.



Reduces noise and sound vibration

It helps to create a more comfortable environment for the user and other people within the building.

Hygienic condition

No migrations: No transfer of chemicals to the surface as happens in recycled rubber tiles

 \cdot Non-porous: No liquids leak through, easy to clean, no mould, no bad odour

Easy to install

- Loose laid flooring
- No adhasira
- No adhesive required
- Easy to change, tile by tile
- Huge time & cost saving-

Aesthetics

- Personalised designs with logos and markings
- Available in 2+4 colours









